


PLAN VIEW




LID

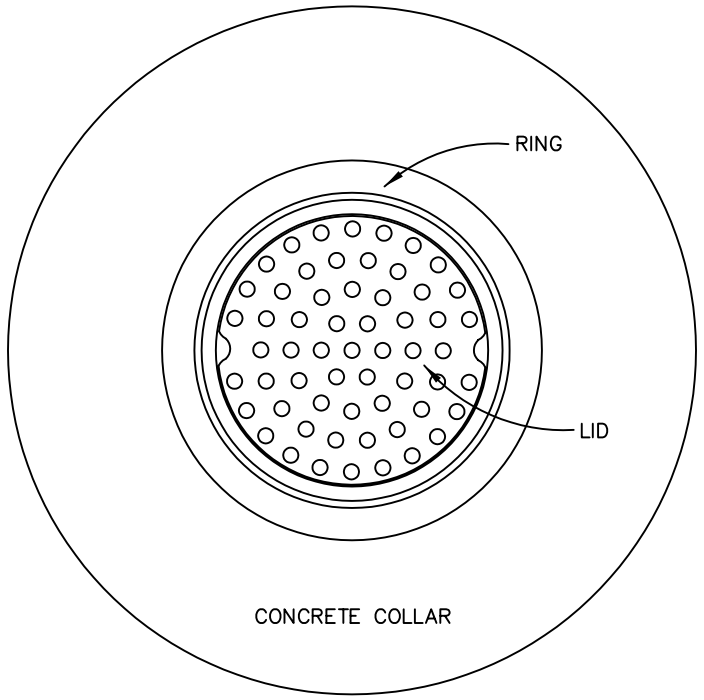


RING

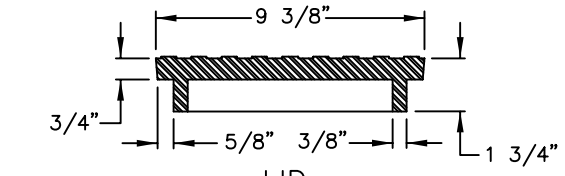


COUNTY STREET MONUMENT

SECTION
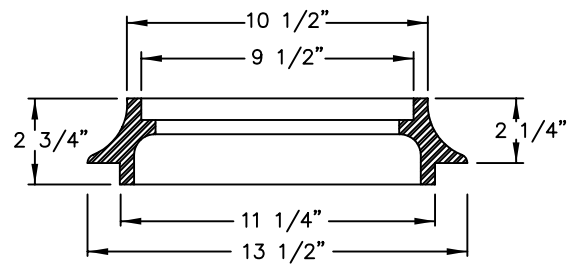
## RING AND LID

CAST IRON to conform to ASTM
A-48, CLASS 35B
H-20 Wheel Loading
Est. Weight: 43 lbs.

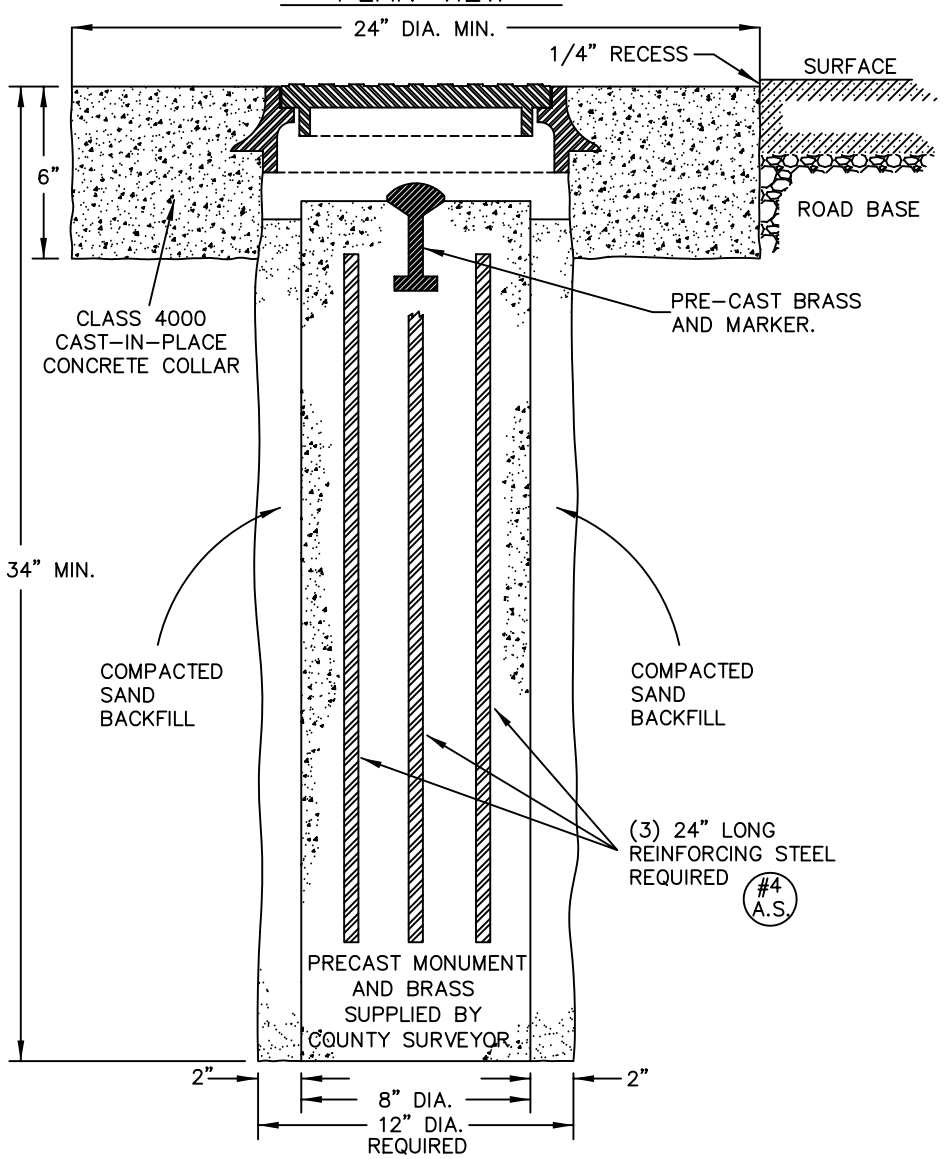


BRASS

## GENERAL NOTES

1. Materials, construction and workmanship shall be in accordance with APWA Manual of Standard Specifications (2002 Edition), and supplements thereto which are in effect at the date of this request.
2. County Monument cover, frame and pre cast brass and marker base shall be furnished by the County as provided in the permitting process.
3. Cover, frame, riser and pre cast brass and marker base can be obtained at Public Works Operations, 7125 South 600 West, Midvale, Utah 84047. The developer, contractor, or agent shall be responsible for the transportation of all monuments and incidental items required to complete the monument installation.
4. The County Surveyor shall check monument point and straddles before monuments can be installed.
5. Reinforcing steel used in County survey monuments shall be No. 4 bars.
6. The County Surveyor shall cross brass marker after installation of survey monument.
7. Contractor shall allow the County Surveyor an opportunity to salvage all existing monuments, specifically; rings, risers, lids, and brass markers.
8. Field inspection by governing entity required prior to installation of monument.

## MONUMENT FLOW PROCESS




NOTE:
SEE SALT LAKE COUNTY SURVEYOR'S MONUMENT PERMIT

- (A) NEW MONUMENT REQUIREMENT
- (B) EXISTING MONUMENT REQUIREMENT
- (C) MONUMENTS REQUIRED AS A CONDITION OF PROJECT APPROVAL.
- (D) UNDER THE DIRECTION OF A LICENSED LAND SURVEYOR.
- (E) PERMITTEE FAX NUMBER OR EMAIL ADDRESS REQUIRED.
- (F) DEVELOPER / AGENT TO IDENTIFY CONTACT PERSON.
- (G) NO POURED IN PLACE MONUMENTS ALLOWED.
- (H) PERMIT EXPIRES 90 CALENDAR DAYS FROM DAY OF ISSUANCE.
- (I) CONTRACTOR TO ALLOW THE COUNTY SURVEYOR AN OPPORTUNITY TO SALVAGE THE EXISTING MONUMENT
- (J) DEVELOPER / AGENT TO NOTIFY GOVERNING ENTITY FOR FIELD INSPECTION AND APPROVAL PRIOR TO INSTALLATION OF MONUMENT.

| NO. | DATE | DESCRIPTION OF REVISION | INITIAL |
|---|---|---|---|
| 3 | 11/04/03 | Revised general Note 1. Concrete Collar specifications. | JWP |
| 2 | 09/26/03 | Revised drawing to show 1/4" recess. | JWP |
| 1 | 07/30/03 | Revised from drawing dated July 1995 by ALM. | LJP |

REVISIONS

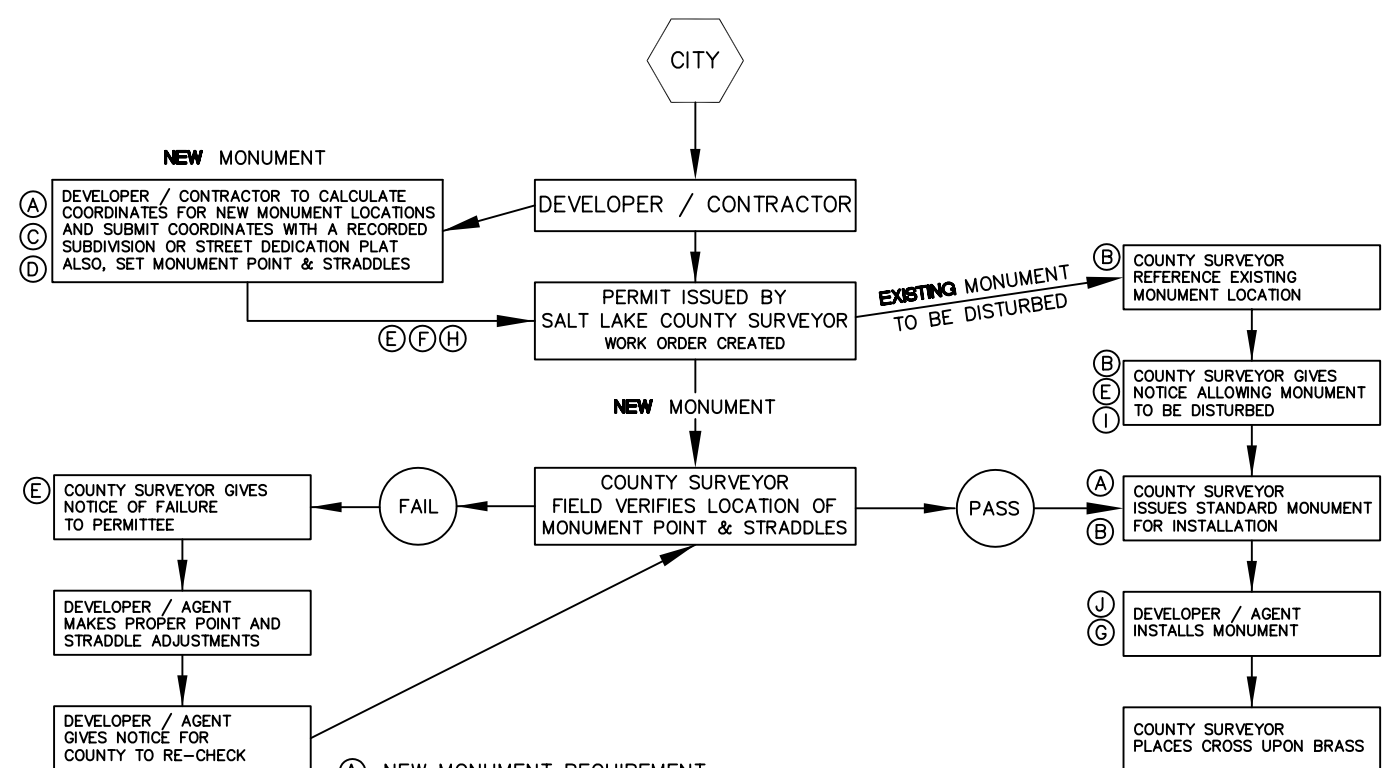0 3" 6" 9" 12"

Sheet No. 1 of 1

Prepared By: LJP Date: 01/30/03
Surveyed By: Date:
Checked By: SVK Date: 01/30/03

Prepared by:
Salt Lake County Surveyor
Vaughn E. Butler, L.S.
2001 S. State St. #N1500
Salt Lake City, Utah 84190-1350
(801) 468-2028

COUNTY STREET MONUMENT AND MONUMENT FLOW PROCESS

SALT LAKE COUNTY